



ZONING PLAN

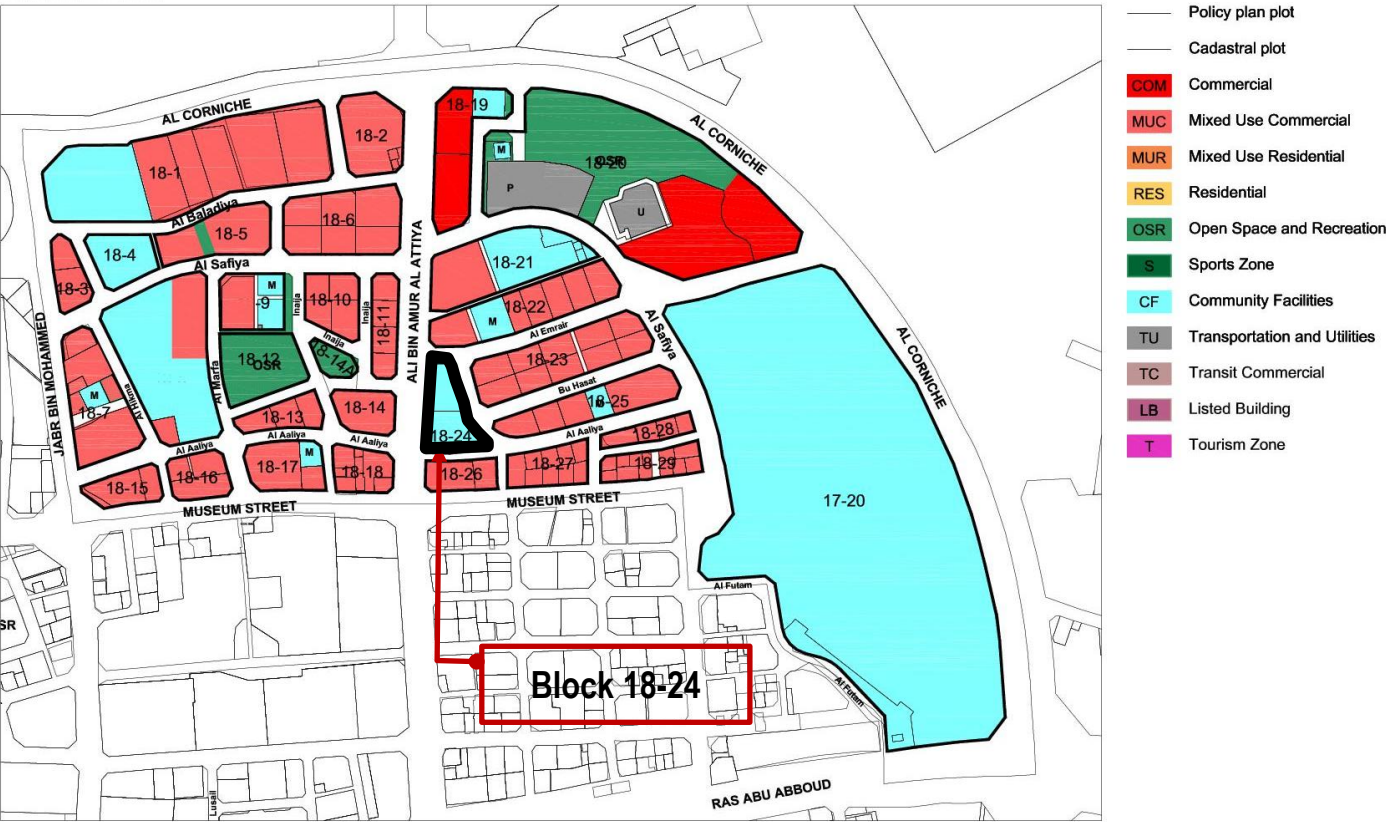


SPECIFIC USE REGULATIONS

Permitted uses	See Permitted Uses Table (page 4)
Recommended Uses	Government Institution: head quarter or main office type which service caters for national or city-wide Community Facility which service caters for national or city-wide
Not permitted uses	All other uses not listed in the General Permitted Uses Table (e.g. garage/car repair/heavy industry etc)
Active Frontage Uses	Percentage: For marked-sides as Active Frontages, min. 60% frontage required as Active Uses Government Offices, Community Centres, Library, etc


USE REGULATIONS

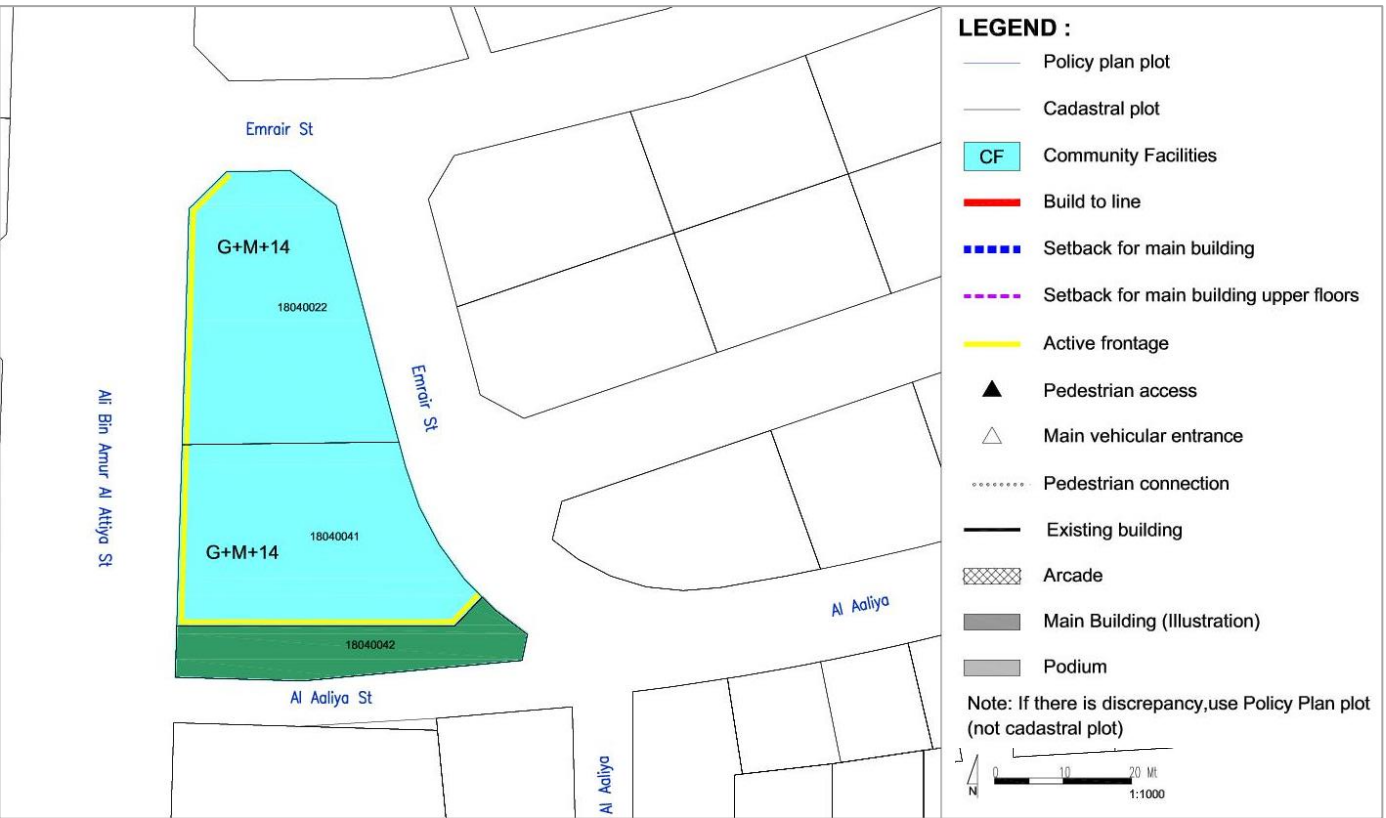


BLOCK MASSING PLAN

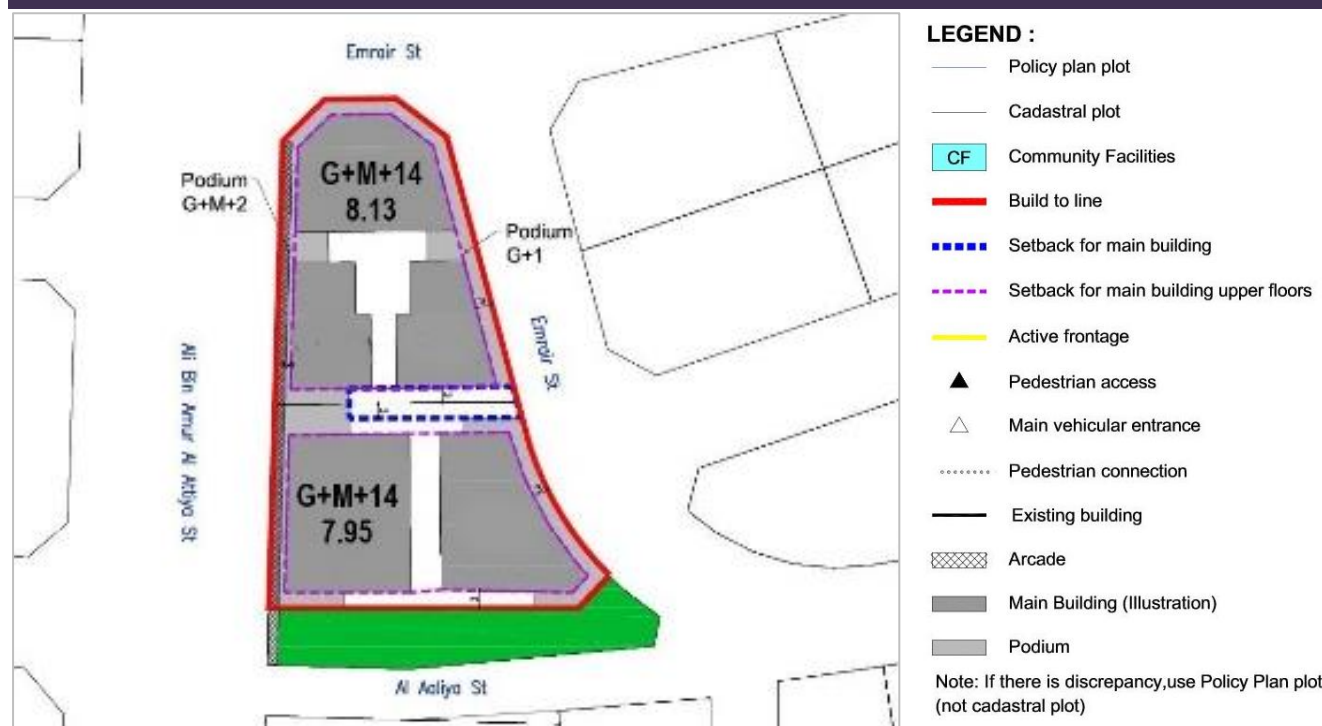

BUILDING ENVELOPE & MASSING ILLUSTRATION

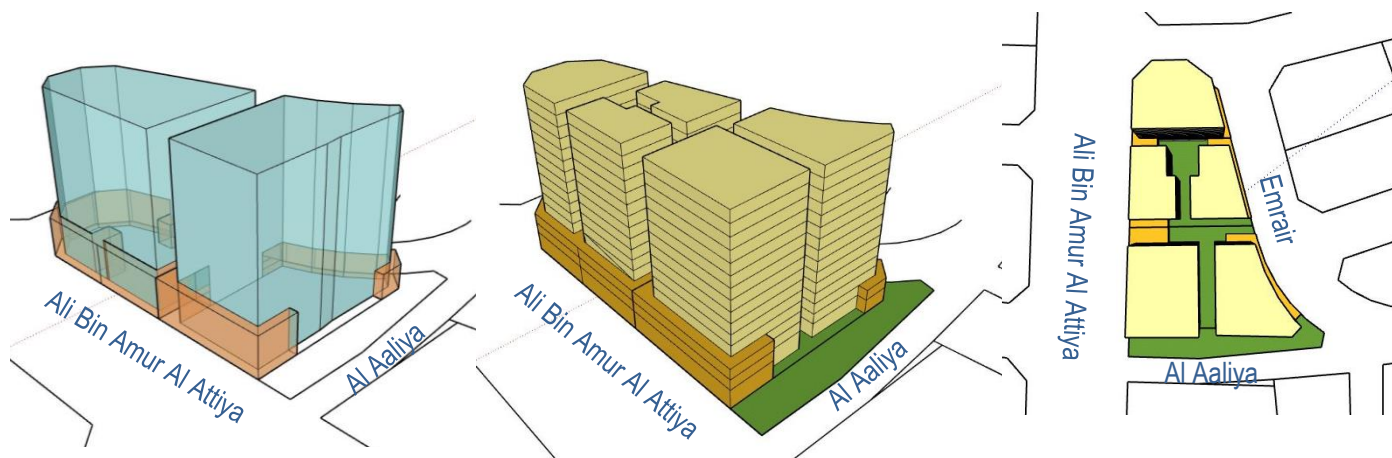

BUILDING TYPOLOGY: ATTACHED PODIUM TOWER (FUTURE REDEVELOPMENT)

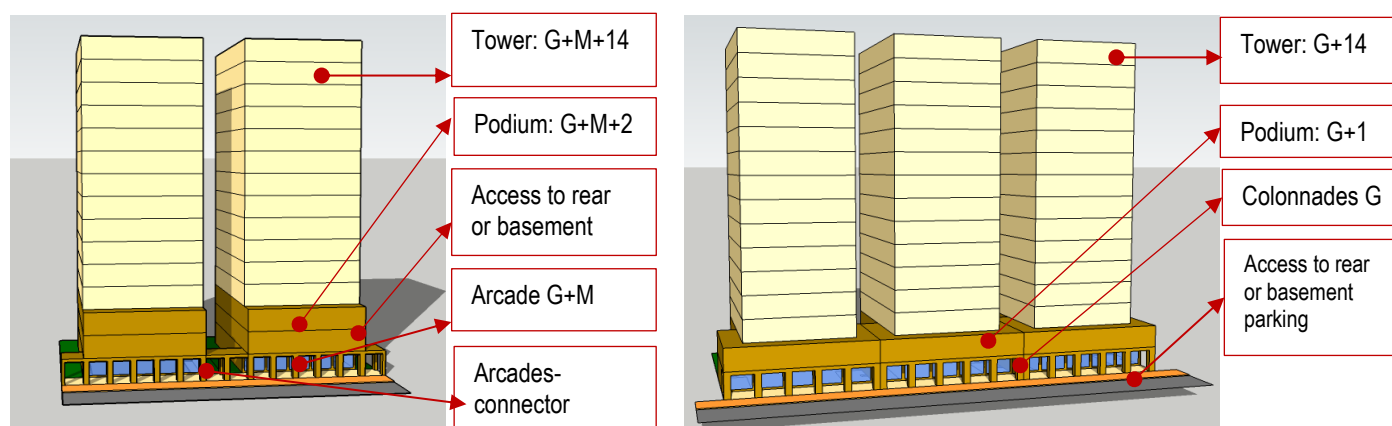

Ali Bin Amur Al Attiya Street

Emrair Street


BLOCK FORM REGULATIONS

BULK REGULATIONS		
Uses (as per Zoning Plan)	Government Institution	
Height (max)	Ali Bin Amur At Attiya Str	57.2 m (max)
	<ul style="list-style-type: none">G+M+14 (Podium G+M+2)	
Height (max) <i>(in the case of possible future subdivision and multiple buildings design)</i>	Emrair & Al Aaliya Street	55.7 m (max)
	<ul style="list-style-type: none">G+14 (Podium G+1)	
FAR (max)	A stated in the Block Massing Plan	
FAR (max) <i>(in the case of possible future subdivision and multiple buildings design)</i>	8.20 (along Ali Bin Amur At Attiya Street)	(+ 5 % for corner lots)
	7.70 (along Emrair & Al Aliya Street)	
Building Coverage (max)	75%	
MAIN BUILDINGS		
Typology (for future redevelopment scenario)	Attached-Podium and Tower	
Building Placement	Setbacks as per block plan:	
	Ali Bin Amur At Attiya Street: <ul style="list-style-type: none"><u>Podium</u>: 0 m front; 0 m on sides, up to 3 m (depth of tower set back) & 3 m for the remaining 1/3 plot depth;<u>Tower</u>: 3m front setback; 3m sides; Emrair Street: set as per Block Massing Plan	
Build to Line <i>(a set building line on a plot, measured parallel from the front and/or corner side plot line, where the structure must be located. The building facade must be located on the build-to line)</i>	Ali Bin Amur At Attiya & Museum Park Street (Collector streets): 100% of 0m front setback (mandatory)	
Building Depth (max)	10 m (single-aspect tower) 15 m (double-aspect tower) 30 m (tower with atrium) 30 m (podium with integrated parking, for plot depth minimum 45 m)	
Building Size	Fine grain; 30 m maximum building width or length	
Primary Active Frontage	As indicated in the plan	
Frontage Profile	Ali Bin Amur At Attiya Street: Arcades-connector (covered walkways) <ul style="list-style-type: none">2.5 m minimum widthG+M maximum heightLocated as per drawing	

	Emrair Street: • Colonnades (a row of columns with minimum 1 meter distance to facade for terrace, etc)
Basement; Half-Basement (undercroft)	• Allowed • 0 m setbacks • 0.5 m maximum height from street level (undercroft)
ANCILLARY BUILDINGS	
Height (max)	G
Setbacks	• Sides: 0 m on sides, up to 3 m (depth of tower set back) & 3 m for the remaining 1/3 plot depth;
Building Depth (max)	7.5m
SITE PLANNING	
Plot Size for Subdivision	Minimum 800 sqm
Small Plot	• Minimum plot size of 800 sqm will allow to reach G+14, with provision of 1 undercroft and 2 basements for car parking. • For plot sizes < 800 m ² : Allowed to be developed up to the maximum parameters set in the plan, subject to possibility of providing required parking on site
Open Space (min)	5%
Plots 2000sqm –9999sqm	• FAR: as stated in the Block Massing Plan • Building Coverage: 75% • Open Space: 10% min • Internal streets & utilities: 15% max
ACCESSIBILITY AND CONNECTIVITY	
Pedestrian Entry Point	As indicated in the plan
Vehicle Access Point	As indicated in the plan
Recommended Public Access on Private Plot	n/a
PARKING	
Location	On-site parking/ undercroft/ basement/ podium parking/ Multi-Storey Car Park (MSCP) for plot size > 2000 sqm
Required Number of Spaces	As per general MSDP Car Parking Regulations
Parking Waiver	30% reduction in parking provision requirement

- All new development should follow the regulations.
- For existing buildings: the setbacks and heights are indicative; for retrofitting /alteration/ modification changes should not exceed the existing massing.
- For existing buildings which are still new and/or in good condition, it is recommended only to add the required front-part of the building (eg. light structure podium) as per indicated set back and build-to-line (which is zero setback) in the plan


LANDSCAPE & ACTIVATE CHAMFER SIDE AT THE INTERSECTION

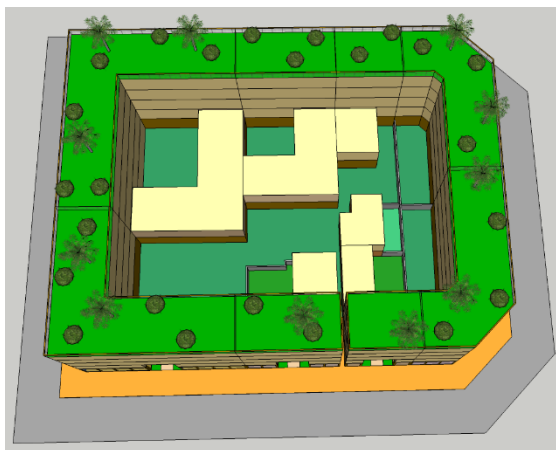

Provision of green terrace roof garden (min. 50% of the area)




Provision of 'green' on the landscaped forecourt (local streets) and court-yard (ie.central/sides/rear court-yard)

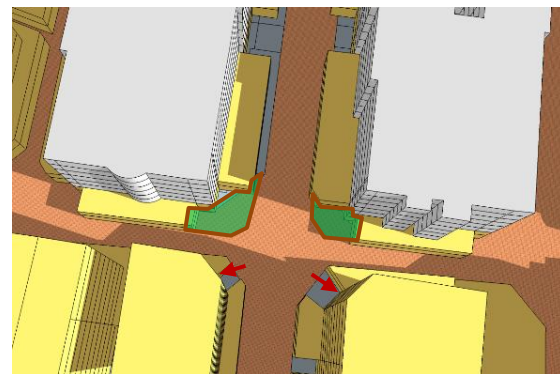

Activate chamfer-sides by provision of openings (windows, doors), entrance for people or landscaped gardens

RECOMMENDED ARCHITECTURAL STYLES

Qatari Contemporary*

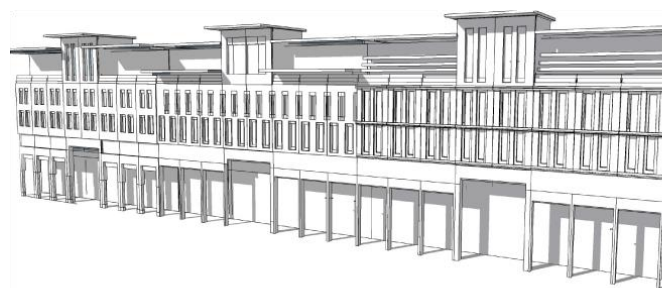

(illustration)




BASE
MIDDLE
TOP

STANDARDS

ARCHITECTURAL STANDARD	
Architectural Theme/ Style	Qatari Contemporary Style (* Refer the details to the Townscape & Architectural Guidelines for Main Streets in Qatar)
Exterior expression	<ul style="list-style-type: none">Clear building expression of a base, a middle and a topThe Base Part (podium): should clearly be expressed (eg. with architrave or cornice ornament, should there is no required setback for tower that can distinguish it from the podium)The Middle Part:<ul style="list-style-type: none">Should adopt local rooted architectural language for its elements such as openings, shutters, balconies, bays etc.Should reveal the external expression of each storeyThe Top Part should be marked by parapet or entablature
Minimum Building separation	<ul style="list-style-type: none">6 m between two buildings with facing non-habitable rooms8 m between two buildings with a facing non-habitable room and a facing habitable room12 m between two buildings with facing habitable rooms
Party-Wall / Common Wall	The attached building's parts should have its own wall and foundation and comply to the standard of construction and fire-safety
Floor height (maximum)	Slab to slab height (mid-point): <ul style="list-style-type: none">Ground floor: 5 mGround floor with mezzanine: 6.5 mTypical floors (residential and other): 3.50 mGround floor ancillary building: 3.50m
Building Orientation	<ul style="list-style-type: none">All the facade's elements (windows, doors, balcony, bay window, etc) should respect the streets based on their hierarchy.Primary facade should orientate to the highway /expressway/ collector/ arterial streets.
Active frontage features	Entrances, <i>madkhal</i> , lobbies, window openings, arcades, porches etc
Active chamfer at the intersection	The chamfer side should be activated by providing main access for people and designing active frontage/facade or small landscaped area with public


	facilities such as benches, public art, small lawn area, etc
Building Material	<ul style="list-style-type: none">Avoid excessive use of glass-wallUse the low environmental impact materials, that conform to ISO 14025, 14040, 14044, and EN 15804 or ISO 21930
Window-to-Wall Ratios	Refer to the diagrams
LANDSCAPE STANDARD	
Forecourt	For buildings along the secondary streets, the forecourts should have small green space for landscape
Barrier/fences	Street side: not allowed Sides and rear: transparent where possible; maximum height 1 m
Green Roof	50% area of the podium and the roof-top should be landscaped with dominant soft-scape (trees, plants, urban farming etc)
ACCESSIBILITY STANDARD	
Pedestrian access	<ul style="list-style-type: none">Main building entrances should be oriented to the side indicated on the plan.Pedestrian Access on the plan indicates the side for main pedestrian access, not the approximate location
Vehicle egress and ingress	<ul style="list-style-type: none">Main Vehicular Access on the plan indicates the side and approximate location of the access, subject to site planning and transportation constraints.
SIGNAGE	
Style	Signage should be an integral part of the building facade without background.

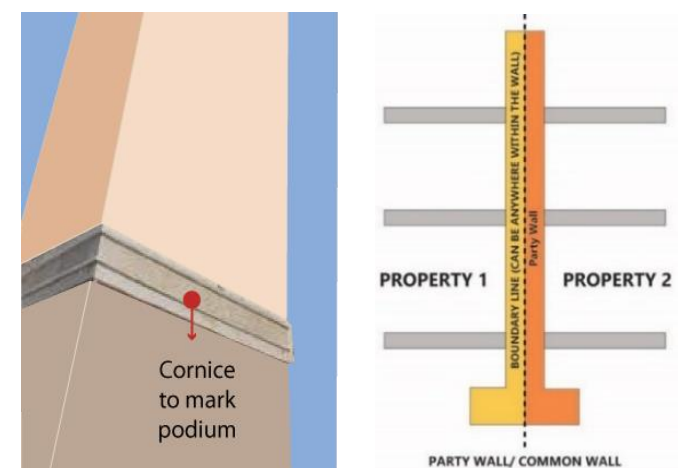

WINDOW-TO-WALL RATIOS



PARKING FORM & LOCATION OPTION

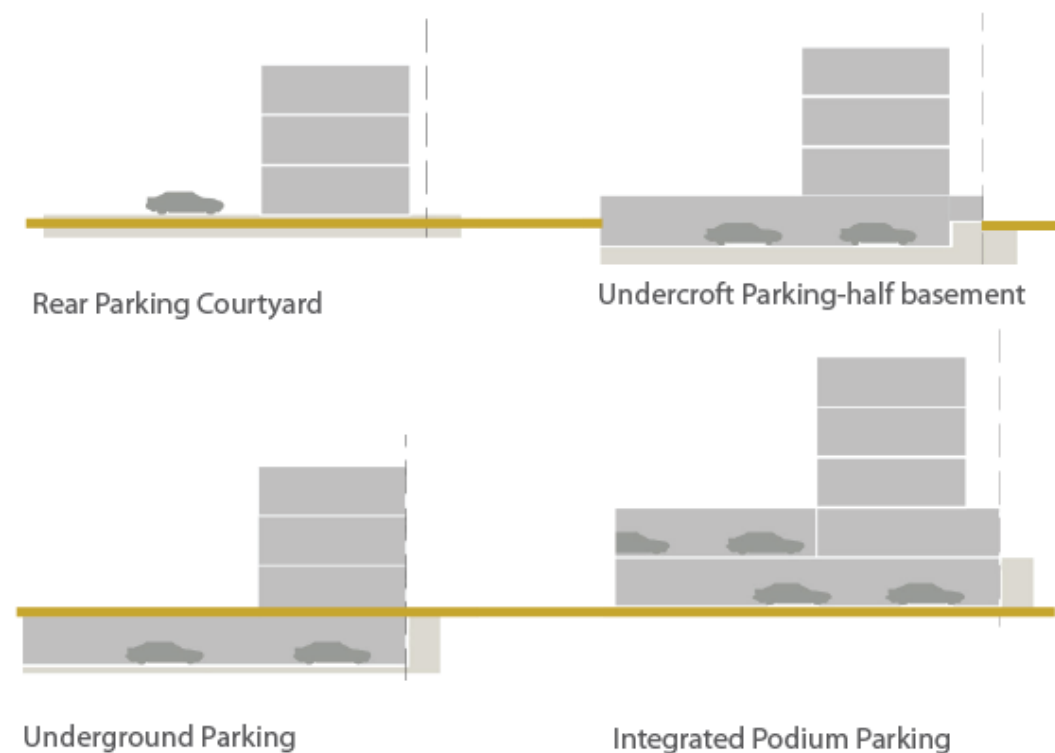

INCENTIVE

Incentive Scheme

Provision of **Privately Owned Public Space – POPS** such *sikka*, pedestrian walkway, public plaza, pocket garden, and Community Facility:
Additional floor area of 5 m2 for every 1m2 provision, up to maximum 10% of total GFA

Provision of **Shared Public Parking**:

Additional floor area of 50 m2 for provision of each one (1) shared-car parking space, up to maximum 10% of total GFA

PERMITTED USES TABLE

Type and category		COM	MUC	MUR	RES	Code	Use
COMMERCIAL							
RETAIL	Convenience	✓	✓	✓	✓	301	Food, Beverage & Groceries Shop
	Comparison/Speciality	✓	✓	✓	✗	302	General Merchandise Store
		✓	✓	✓	✗	303	Pharmacy
		✓	✓	✓	✗	306	Electrical / Electronics / Computer Shop
		✓	✓	✓	✗	309	Apparel and Accessories Shop
	Food and Beverage	✓	✓	✓	✓	311	Restaurant
		✓	✓	✓	✓	312	Bakery
		✓	✓	✓	✓	313	Café
	Shopping Malls	✓	✓	✗	✗	314	Shopping Mall
	E-charging Stations	✓	✗	✗	✗	307	E-charging Station
OFFICE	Services/Offices	✓	✓	✓	✗	401	Personal Services
		✓	✓	✓	✗	402	Financial Services and Real Estate
		✓	✓	✓	✗	403	Professional Services
RESIDENTIAL							
	Residential	✗	✓	✓	✓	201	Residential Flats / Apartments
HOSPITALITY							
	Hospitality accommodation	✓	✓	✓	✗	2201	Serviced Apartments
		✓	✓	✓	✗	2202	Hotel / Resort
SECONDARY / COMPLEMENTARY							
COMMUNITY FACILITIES	Educational	✗	✓	✓	✓	1003	Private Kindergarten / Nurseries / Child Care Centers
		✓	✓	✓	✗	1020	Technical Training / Vocational / Language School / Centers
		✗	✓	✓	✗	1021	Boys Qur'anic School / Madrasa / Markaz
		✗	✓	✓	✗	1022	Girls Qur'anic School
	Health	✓	✓	✓	✗	1102	Primary Health Center
		✓	✓	✓	✗	1103	Private Medical Clinic
		✓	✓	✗	✗	1104	Private Hospital/Polyclinic
		✓	✓	✓	✓	1105	Ambulance Station
		✓	✓	✗	✗	1106	Medical Laboratory / Diagnostic Center
	Governmental	✗	✓	✗	✗	1201	Ministry / Government Agency / Authority
		✗	✓	✗	✗	1202	Municipality
		✓	✓	✓	✗	1203	Post Office
		✓	✓	✓	✓	1209	Library
	Cultural	✓	✓	✓	✗	1301	Community Center / Services
		✓	✓	✓	✗	1302	Welfare / Charity Facility
		✓	✓	✗	✗	1303	Convention / Exhibition Center
		✓	✓	✓	✓	1304	Art / Cultural Centers
	Religious	✓	✓	✓	✗	1406	Islamic / Dawa Center
SPORTS AND ENTERTAINMENT	Open Space & Recreation	✓	✓	✓	✓		Park - Pocket Park
		✓	✓	✗	✗	1504	Theatre / Cinema
		✓	✓	✓	✓		Civic Space - Public Plaza and Public Open Space
		✓	✓	✓	✓		Green ways / Corridors
	Sports	✗	✓	✓	✗	1607	Tennis / Squash Complex
		✗	✓	✓	✓	1609	Basketball / Handball / Volleyball Courts
		✗	✓	✓	✓		Small Football Fields
		✗	✓	✓	✓	1610	Jogging / Cycling Track
		✓	✓	✓	✓	1611	Youth Centre
		✗	✓	✓	✗	1612	Sports Hall / Complex (Indoor)
		✓	✓	✓	✓		Private Fitness Sports (Indoor)
		✓	✓	✓	✓	1613	Swimming Pool
	Special Use	✓	✓	✗	✗	2107	Immigration / Passport Office
		✓	✓	✗	✗	2108	Customs Office
	Tourism	✓	✓	✗	✗	2203	Museum

- Supporting uses serves only to the primary use should not be regarded as a separate use. Therefore, their floor area calculation should be included in the GFA of the primary use (e.g. gym facility for residents in an apartment building should be calculated in the Residential GFA, or facilities of a hotel for guests should be calculated in Hospitality GFA).
- Unlisted uses in the table are categorised as non-permitted uses, especially the hazardous/ polluted uses (e.g car repair shops, industries, polluted-workshops, etc).
- Similar uses to the permitted uses in the table will be regarded as conditional cases.