

ZONING PLAN

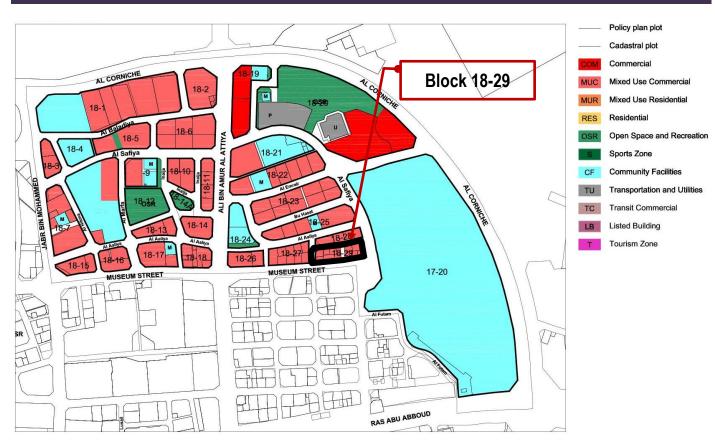

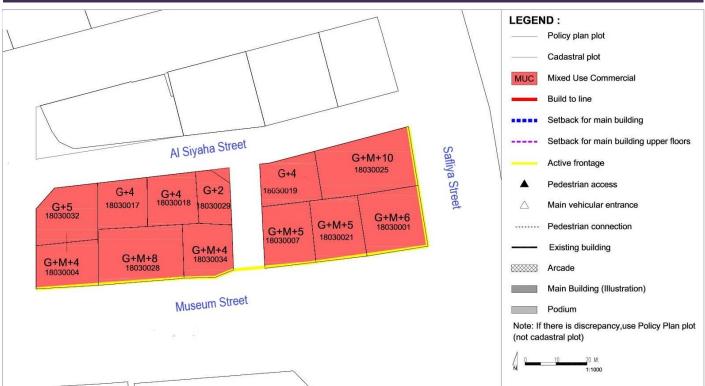

GENERAL USE MIX					
Zoning Category		Commercial	Mixed Use Commercial	Mixed Use Residential	Residential
Zoning Code		СОМ	MUC	MUR	RES
Minimum	n required number of use type*	1	2	2	1
	Commercial:	~	**	✓	*
Use Type per Zoning Category	Residential (Flats, Apartments)	*	✓	*	7
	Hospitality (Hotels, Serviced Apartments)	✓	✓	✓	✓
	Secondary/Complementary Uses (Community Facilities, Sport & Entertainment)	✓	✓	✓	✓
See details	of Permitted Uses Table in page 4				

DETAILED USE SPLIT					
	Uses Mix	GFA split			
MUC: Mixed Use Commercial		Plot < 2000 sqm or for Single Tower/ Higher Building	Plot ≥ 2000 sqm or for Multiple Tower/ Higher Buildings	Allowed Floor Location	
Commercial**:		Total Com. 25% min	Total Com. 25% min	All	
Retail Office	V	Retail 25% max	Retail 25% max	Retail at ground level; podium; 1st floor above podium; top floor level	
Residential (Flats, Apartments)	✓	80% max	80% max	All	
Hospitality (Hotels, Serviced Apartments)	√		40% max	All Semi-public /publicly accessible facilities (e.g. commercial space) at ground level; podium; 1st floor above podium; top floor level	
Secondary/Complementary Uses	✓	20% max		Podium; 1st floor above podium; top level	

Uses mix: ☑ Required; ✓ Allowed; ➤ Not allowed;


* In Mixed Use Residential, the required Residential Use Type can be substituted with Hospitality Use Type (e.g. hotel, serviced apartment);

** In Mixed Use Commercial, mixing between Commercial Uses only (Retail & Office) is allowed and this already fulfils the requirement 2 mix


III WIXCO OSC COMMITCICION, MIXING SCRWCCH COMMI	in wixed use commercial, mixing between commercial uses only (itetali & Onice) is allowed and this already idnits the requirement 2 mix			
SPECIFIC USE REGULATIONS				
Permitted uses	See Permitted Uses Table (page 4)			
Recommended Uses	Type of commercial in MUC: Establishments and offices with goods or services that cater city-wide (ie. main offices) and complementary to the cultural facilities in the Downtown area			
Not permitted uses	All other uses not listed in the General Permitted Uses Table (e.g. garage/car repair/heavy industry etc)			
Active Frontage Uses	Percentage: For marked-sides as Active Frontages, min. 60% frontage required as Active Uses			
	Retail, Shops, Food and Beverage (F&B), Offices, Services, Hotels, Government Offices, Clinics, Community Centres, Libraries, etc			

BLOCK MASSING PLAN LEGEND : afliva Str Podium G+1 Al Siyaha Street G+M+10 Siyaha max 2/3 plot depth (up to max 15 m) Podium G+M+2 7 G+5 G+1 4.2 Podium max 2/3 plot depth (up to max 15 m) G+M+2 3.8 Note: If there is discrepancy,use Policy Plan plot Podium G+M+2 G+M+2 Podium Podium G+M+2 MUSEUM Street G+M+2

BUILDING ENVELOPE & MASSING ILLUSTRATION

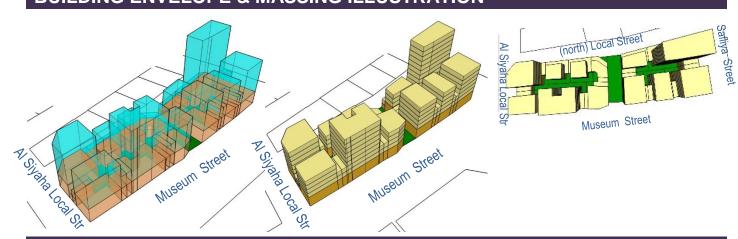

BUILDING TYPOLOGY: ATTACHED-PODIUM AND TOWER

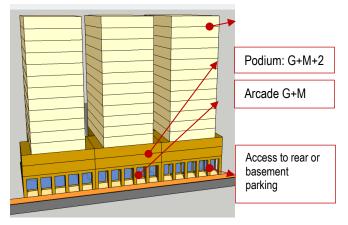

Museum & Safliya Street (Collector Streets)


BLOCK FORM REGULATIONS

BULK REGULATIONS				
Uses (as per Zoning Plan)	MUC: Mixed Use Commerc	ial		
Height (max)	As stated in the Block Massing Plan			
Height (max) (in the case of future consolidation with adjacent	Museum & Safliya Street	57.2 m (max)		
plots, and the new plot size aligns with minimum criteria of 800 sqm for G+14 max, as set	• G+M+14 (Podium G+M+2)			
for Zone 18)	Al Siyaha Street 55.7 m			
	• G+14 (Podium G+1)	(max)		
FAR (max)	As stated in the Block Mass	ing Plan		
FAR (max) (in the case of future consolidation with adjacent	8.20 (along Museum & Safliya Street)	(+ 5 % for corner lots)		
plots, and the new plot size aligns with minimum criteria of 800 sqm for G+14 max, as set for Zone 18)	7.70 (along Al Siyaha Street)			
Building Coverage (max)	75%			
MAIN BUILDINGS				
Typology	Attached-Podium and Towe	er		
Building Placement	Setbacks as per block plan:			
	 Museum & Safliya Street: Podium: 0 m front; 0 m on sides, up to 2/3 plot depth (max.15 m) & 3 m for the remaining 1/3 plot depth; Tower: 3 m front setback; 3m sides; 			
	Al Siyaha Street: Podium: 0 m front; 0 m o 2/3 plot depth (max.15 m) remaining 1/3 plot depth; Tower: 3 m front setback;	& 3 m for the		
Build to Line (a set building line on a plot, measured parallel from the front and/or corner side plot line, where the structure must be located. The building facade must be located on the build-to line)	Museum Safliya Str (Collector streets): 100% of 0m front setback (mandatory) Al Siyaha Street (Local street): min. 60% of frontage indicated at block plan			
Building Depth (max)	10 m (single-aspect tower) 15 m (double-aspect tower) 30 m (tower with atrium) 30 m (podium with integrated parking, for plot depth minimum 45 m)			
Building Size	Fine grain; 30m maximum building width or length			
Primary Active Frontage	As indicated in the plan			
Frontage Profile	Museum & Safliya Street Arcades (covered walkway 2.5 m minimum width G+M maximum height			

	Located as per drawing
	Al Siyaha Street: Fore-court; cantilever/overhang on the ground floor
Basement; Half- Basement (undercroft)	Allowed 0 m setbacks 0.5 m maximum height from street level (undercroft)
ANCILLARY BUILDINGS	
Height (max)	G
Setbacks	Sides: 0 m, up to 2/3 plot depth (max.15 m) & 3 m for the remaining 1/3 plot depth;
Building Depth (max)	7.5m
SITE PLANNING	
Plot Size for Subdivision	Minimum 800 sqm
Small Plot	Minimum plot size of 800 sqm will allow to reach G+14, with provision of 1 undercroft and 2 basements for car parking. For plot sizes < 800 m2: Allowed to be developed up to the maximum parameters set in the plan, subject to possibility of providing required parking on site
Open Space (min)	5%
ACCESSIBILITY AND CO	DNNECTIVITY
Pedestrian Entry Point	As indicated in the plan
Vehicle Access Point	As indicated in the plan
Recommended Public Access on Private Plot	n/a
PARKING	
Location	On-site parking/ undercroft/ basement/ podium parking/ Multi-Storey Car Park (MSCP) for plot size > 2000 sqm
Required Number of Spaces	As per general MSDP Car Parking Regulations
Parking Waiver	30% reduction in parking provision requirement; Relaxation for plots ≤ 350 sqm, provided all safety measures are fulfilled as per Qatar Parking Design Manual-QPDM (refer to page 4 for details): 1) Allowable stall parking dimension of 2.5m x 5.5 m 2) Allowable single driveway (not ramp) provision of 3.5m width to the rear onsite parking

- All new development should follow the regulations.
- For existing buildings: the setbacks and heights are indicative, for retrofitting /alteration/ modification changes should not exceed the existing massing.
- For existing buildings which are still new and/or in good condition, it is recommended only to add the required front-part of the building (eg. light structure podium) as per indicated set back and build-to-line (which is zero setback) in the plan

BUILDING TYPOLOGY

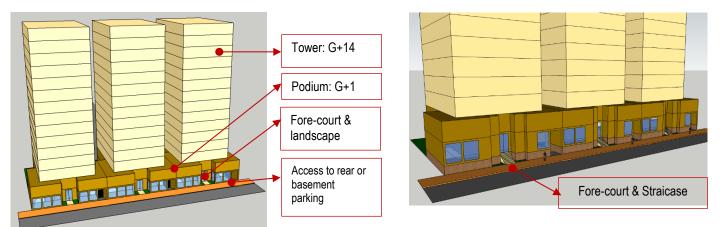



Al Siyaha Street: Local Street Type 1 (Fore-court & landscape); or Local Street Type 2 (Fore-court & Staircase), if there is halfbasement)

LANDSCAPE & ACTIVATE CHAMFER SIDE AT THE INTERSECTION







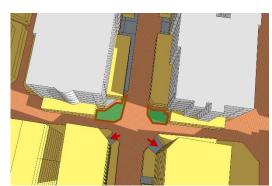


Activate chamfer-sides by provision of openings (windows, doors), entrance for people or landscaped gardens

RECOMMENDED ARCHITECTURAL STYLES

Qatari Contemporary*



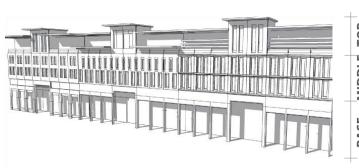








(illustration)

STANDARDS

ARCHITECTURAL STANDARD				
Architectural Theme/ Style	Qatari Contemporary Style (* Refer the details to the <u>Townscape & Architectural Guidelines for Main Streets in Qatar</u>)			
Exterior expression	Clear building expression of a base, a middle and a top			
	The Base Part (podium): should clearly be expressed (eg.with architrave or corniche ornament, should there is no required setback for tower that can distinguish it from the podium)			
	The Middle Part: Should adopt local rooted architectural language for its elements such as openings, shutters, balconies, bays etc. Should reveal the external expression of each storey			
	The Top Part should be marked by parapet or entablature			
Minimum Building separation	 6 m between two buildings with facing non-habitable rooms 8 m between two buildings with a facing non-habitable room and a facing habitable room 12 m between two buildings with facing habitable rooms 			
Party-Wall / Common Wall	The attached building's parts should have its own wall and foundation and comply to the standard of contruction and fire-safety			
Floor height (maximum)	Slab to slab height (mid-point): Ground floor: 5 m Ground floor with mezzanine: 6.5 m Typical floors (residential and other): 3.50 m Ground floor ancillary building: 3.50 m			
Building Orientation	 All the fasade's elements (windows, doors, balcony, bay window, etc) should respect the streets based on their hierarchy. Primary fasade should orientate to the highway /expressway/ collector/ arterial streets. 			
Active frontage features	Entrances, <i>madkhal</i> , lobbies, window openings, arcades, porches etc			
Active chamfer at the intersection	The chamfer side should be activated by providing main access for people and designing active frontage/fasade or small landscaped area with public			


	facilities such as benches, public art, small lawn area, etc	
Building Material	Avoid excessive use of glass-wall Use the low environmental impact materials, that conform to ISO 14025, 14040, 14044, and EN 15804 or ISO 21930	
Window-to-Wall Ratios	Refer to the diagrams	
LANDSCAPE STANDARD		
Forecourt	For buildings along the secondary streets, the forecourts should have small green space for landscape	
Barrier/fences	Street side: not allowed Sides and rear: transparent where possible; maximum height 2.5 m	
Green Roof	50% area of the podium and the roof- top should be landscaped with dominant soft-scape (trees, plants, urban farming etc)	
ACCESSIBILITY STANDA	RD	
Pedestrian access	 Main building entrances should be oriented to the side indicated on the plan. Pedestrian Access on the plan indicates the side for main pedestrian access, not the approximate location 	
Vehicle egress and in- gress	Main Vehicular Access on the plan indicates the side and approximate location of the access, subject to site planning and transportation constraints.	
SIGNAGE		
Style	Signage should be an integral part of the building fasade without background.	
	7	

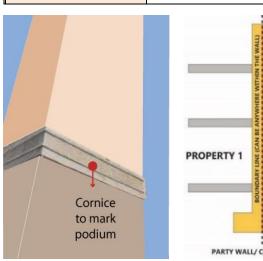

WINDOW-TO-WALL RATIOS




PARKING FORM & LOCATION OPTION

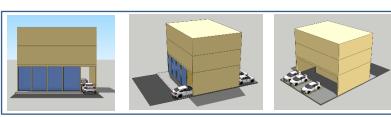

Parking at rear on small plots ≤ 350 sqm (illustration)

Conditional Requirements for Relaxation on Plots ≤ 350 sqm:

- (a) The Owner/Developer to conduct a Parking Safety Audit as per QPDM and implement safety measures as suggested by the Safety Auditor;
- (b) Provide exclusive signage and pavement marking cautioning the motorists and facility users (as per QPDM);
- (c) Guidance on parking operations, accessible parking, pedestrian sidewalk to be adopted as per QPDM.
- (d) The parking facility to be managed by trained security personnel/traffic marshal, where possible;
- (e) Preferable use mechanical, automated, robotic parking systems, where possible;
- (f) Use of Intelligent Transportation System technologies such as Variable Message Signage, etc, where possible.

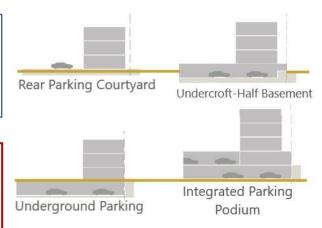

INCENTIVE

Incentive Scheme

Provision of **Privately Owned Public Space – POPS** such *sikka*, pedestrian walkway, public plaza, pocket garden, and Community Facility: Additional floor area of 5 m2 for every 1 m2 provision, up to maximum 10% of total GFA

Provision of Shared Public Parking:

Additional floor area of 50 m2 for provision of each one (1) shared-car parking space, up to maximum 10% of total GFA

PERMITTED USES TABLE

Type and category COM MUC MUR RES Code Use COMMERCIAL Convenience Comparison/Speciality	op						
Convenience	op						
Comparison/Speciality	op						
V	op						
V	op						
Food and Beverage							
V							
V							
V							
Shopping Malls E-charging Stations Services/Offices Services/Offices Shopping Malls F-charging Stations Services/Offices Services/Off							
Services/Offices X							
Services/Offices							
✓ ✓ × 402 Financial Services and Real Estate ✓ ✓ × 403 Professional Services RESIDENTIAL Residential × ✓ ✓ 201 Residential Flats / Apartments							
RESIDENTIAL Residential							
RESIDENTIAL Residential							
Residential × ✓ ✓ ✓ 201 Residential Flats / Apartments							
HOSPITALITY							
Hospitality accommodation ✓ ✓ ✓ × 2201 Serviced Apartments							
✓ ✓ × 2202 Hotel / Resort							
SECONDARY / COMPLEMENTARY							
Educational * \sqrt{ 1003 Private Kindergarten / Nurseries / Chil	d Care Centers						
✓ ✓ × 1020 Technical Training / Vocational / Lang							
* * 1021 Boys Qur'anic School / Madrasa / Mar							
★							
Health ✓ ✓ ✓ × 1102 Primary Health Center							
V							
✓ ✓ × × 1104 Private Hospital/Polyclinic							
✓ ✓ ✓ 1105 Ambulance Station							
✓ ✓ × × 1106 Medical Laboratory / Diagnostic Cente	er						
☐ Governmental × ✓ × × 1201 Ministry / Government Agency / Autho	rity						
x √ x 1202 Municipality							
▼ ✓ ✓ × 1203 Post Office							
✓ ✓ ✓ 1209 Library							
Cultural ✓ ✓ ✓ × 1301 Community Center / Services							
✓ ✓ × 1302 Welfare / Charity Facility							
✓ ✓ × × 1303 Convention / Exhibition Center							
✓ ✓ ✓ 1304 Art / Cultural Centers							
Religious							
□ Open Space & Recreation ✓ ✓ ✓ Park - Pocket Park							
✓ ✓ × × 1504 Theatre / Cinema							
Civic Space - Public Plaza and Public	Open Space						
Green ways / Corridors							
Sports × ✓ × 1607 Tennis / Squash Complex							
x v v 1609 Basketball / Handball / Volleyball Cour	rts						
x ✓ ✓ Small Football Fields							
x v v 1610 Jogging / Cycling Track							
Sports V V X X 1504 Theatre / Cinema							
x v x 1612 Sports Hall / Complex (Indoor)							
Private Fitness Sports (Indoor)							
The state of the s							
Special Use							
Tourism ✓ ✓ × × 2203 Museum							

- Supporting uses serves only to the primary use should not be regarded as a separate use. Therefore, their floor area calculation should be included in the GFA of the primary use (e.g. gym facility for residents in an apartment building should be calculated in the Residential GFA, or facilities of a hotel for guests should be calculated in Hospitality GFA).
- Unlisted uses in the table are categorised as non-permitted uses, especially the hazardous/ polluted uses (e.g car repair shops, industries, polluted-workshops, etc).
- Similar uses to the permitted uses in the table will be regarded as conditional cases.