

ZONING PLAN

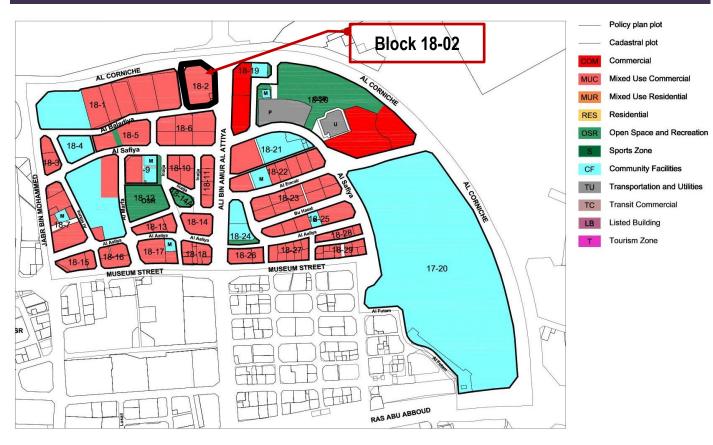

USE	REGL	JLAT	IONS

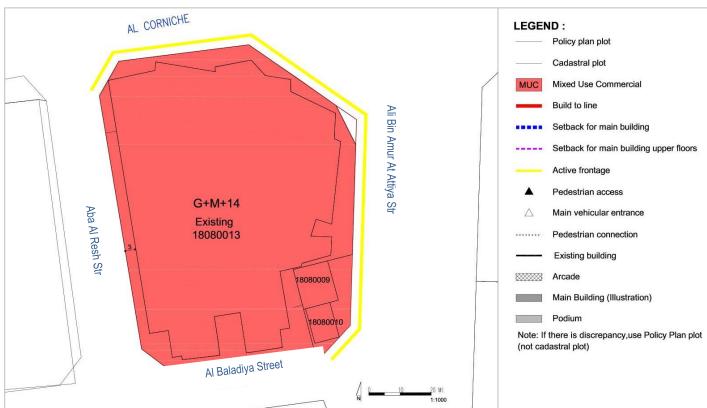

GENER/	AL USE MIX				
Zoning Category		Commercial	Mixed Use Commercial	Mixed Use Residential	Residential
	Zoning Code	СОМ	MUC	MUR	RES
Minimum	required number of use type*	1	2	2	1
	Commercial:	7	√ **	✓	*
Use Type	Residential (Flats, Apartments)	*	✓	✓ *	V
Zoning Category	Hospitality (Hotels, Serviced Apartments)	✓	✓	✓	✓
	Secondary/Complementary Uses (Community Facilities, Sport & Entertainment)	✓	✓	✓	✓
See details	of Permitted Uses Table in page 4				

DETAILED USE SPLIT					
		GFA split			
MUC: Mixed Use Commercial	Uses Mix	Plot < 2000 sqm or for Single Tower/ Higher Building	Plot ≥ 2000 sqm or for Multiple Tower/ Higher Buildings	Allowed Floor Location	
Commercial**:	V	Total Com. 25% min	Total Com. 25% min	All	
Retail Office		Retail 25% max	Retail 25% max	Retail at ground level; podium; 1st floor above podium; top floor level	
Residential (Flats, Apartments)	✓	80% max	80% max	All	
Hospitality (Hotels, Serviced Apartments)	√		40% max	All Semi-public /publicly accessible facilities (e.g. commercial space) at ground level; podium; 1st floor above podium; top floor level	
Secondary/Complementary Uses	✓	20% max		Podium; 1st floor above podium; top level	

Uses mix: ☑ Required; ✓ Allowed; ➤ Not allowed;


* In Mixed Use Residential, the required Residential Use Type can be substituted with Hospitality Use Type (e.g. hotel, serviced apartment);

** In Mixed Use Commercial, mixing between Commercial Uses only (Retail & Office) is allowed and this already fulfils the requirement 2 mix

In winded ose confined dai, mixing between confined as oses only (Netali & Onice) is allowed and this already fulfils the requirement 2 mix			
SPECIFIC USE REGULATIONS			
Permitted uses	See Permitted Uses Table (page 4)		
Recommended Uses	Type of commercial in MUC: Establishments and offices with goods or services that cater city-wide (ie. main offices) and complementary to the cultural facilities in the Downtown area		
Not permitted uses	All other uses not listed in the General Permitted Uses Table (e.g. garage/car repair/heavy industry etc)		
Active Frontage Uses	Percentage: For marked-sides as Active Frontages, min. 60% frontage required as Active Uses		
	Retail, Shops, Food and Beverage (F&B), Offices, Services, Hotels, Government Offices, Clinics, Community Centres, Libraries, etc		



BUILDING ENVELOPE & MASSING ILLUSTRATION

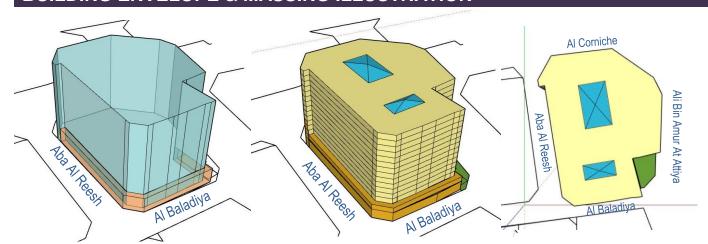

BUILDING TYPOLOGY: ATTACHED-PODIUM AND TOWER Tower G+M+14 Tower: G+M+14 Prominent tower Podium: G+M+2 expression (60% of width), with partially-Access to rear or recessed- podium (40% of width) basement parking Podium: G+M+4 Arcades G+M Front Colonnades Podium (rear Arcadesbuilding) G+M+2 for entrance G+M

Corniche Street (Arterial Street)

Ali Bin Amur At Attiya Street (Collector Street)


BLOCK FORM REGULATIONS

, – .				
Uses (as per Zoning Plan)	MUC: Mixed Use Commercial			
Height (max)	Ali Bin Amur At Attiya Str 57.2 m (max)			
	• G+M+14 (Podium G+M+2)			
	Al Baladiya Street	55.7 m (max)		
	• G+14 (Podium G+1)			
	Al Corniche Street	59.2 m (max)		
	• G+M+14 (Podium G+M+4)			
FAR (max) (for large plots > 2000 sgm or ≥	8.20 (along Ali Bin Amur At Attiya Street)	(+ 5 % for corner lots)		
10,000 sqm, refer to the Block Massing Plan and Site Planning)	8.50 (along Al Corniche Street)			
Building Coverage (max)	75%			
MAIN BUILDINGS				
Typology	Attached-Podium and Tower			
Building Placement	Setbacks as per block plan:			
	Al Corniche Street: Podium: 0 m front (60% of width); and 5 m front setback (40% of width); 0 m on sides, up to 2/3 plot depth (max.15 m) & 3 m for the remaining 1/3 plot depth; 6 m rear Tower: 0 m front setback (60% of width); 3 m sides; 6 m rear			
	Al Baladiya & Aba Al Resh Street			
	Podium: 0m front; 0 m side side side plot depth (max.15 m) & 3 m remaining 1/3 plot depth; 6 m Tower: 3 m front setback; 3 m rear	for the rear		
Build to Line	Al Corniche Street (Arterial street): 60% of 0m front setback Ali Bin Amur At Attiya Street (Collector street: 100% of 0m front setback (mandatory) Al Baladiya & Aba Al Resh Street: 80% of 0 m front setback			
Building Depth (max) (a set building line on a plot, measured parallel from the front and/or comer side plot line, where the structure must be located. The building facade must be located on the build-to line)	10 m (single-aspect tower) 15 m (double-aspect tower) 30 m (tower with atrium) 30 m (podium with integrated parking, for plot depth minimum 45 m)			
Building Size	Fine grain; 30 m maximum building width or length; or Create 'a height break impression' (e.g. insert 1-2 storey podium in between, variety fasade design based on modular approach) every interval of 30 m, if the building is stretched too long			

Primary Active Frontage	As indicated in the plan		
Frontage Profile	Al Corniche Street: Colonnades (a row of colums with minimum 3 meter distance to fasade for terrace, etc) Ali Bin Amur At Attiya Street: Arcades-connector (covered walkways) 2.5 m minimum width G+M maximum height Located as per drawing Al Baladiya & Aba Al Resh Street: Fore-court; cantilever/overhang on the ground floor		
Basement; Half-Basement (undercroft)	Allowed 0 m setbacks 0.5 m maximum height from street level (undercroft)		
ANCILLARY BUILDINGS			
Height (max)	G		
Setbacks	• Sides: 0 m, up to 2/3 plot depth (max.15 m) & 3 m for the remaining 1/3 plot depth;		
Building Depth (max)	7.5 m		
SITE PLANNING			
Plot Size for Subdivision	Minimum 800 sqm		
Small Plot	 Minimum plot size of 800 sqm will allow to reach G+14, with provision of 1 undercroft and 2 basements for car parking. For plot sizes < 800 m2: <p>Allowed to be developed up to the maximum parameters set in the plan, subject to possibility of providing required parking on site </p> 		
Plots 2000sqm –9999sqm	 FAR: as stated in the Block Massing Plan Building Coverage: 75% Internal open space: 10% min Internal streets & utilities: 15% max 		
ACCESSIBILITY AND CO	NNECTIVITY		
Pedestrian Entry Point	As indicated in the plan		
Vehicle Access Point	As indicated in the plan		
Recommended Public Access on Private Plot	n/a		
PARKING			
Location	On-site parking/ undercroft/ basement/ podium parking/ Multi-Storey Car Park (MSCP) for plot size > 2000 sqm		
Required Number of Spaces	As per general MSDP Car Parking Regulations		
Parking Waiver	30% reduction in parking provision requirement;		

- All new development should follow the regulations.
- For existing buildings: the setbacks and heights are indicative, for retrofitting /alteration/ modification changes should not exceed the existing massing.
- For existing buildings which are still new and/or in good condition, it is recommended only to add the required front-part of the building (eg. light structure podium) as per indicated set back and build-to-line (which is zero setback) in the plan

LANDSCAPE & ACTIVATE CHAMFER SIDE AT THE INTERSECTION

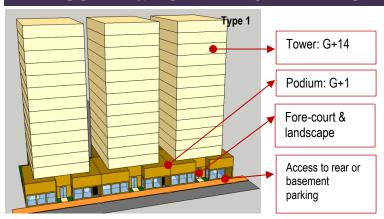



Al Baladiya Street (Local Street): Local Street Type 1 (Fore-court & landscape) or Local Street Type 2 (Fore-court & Staircase, if there is half-basement)

LANDSCAPE & ACTIVATE CHAMFER SIDE AT THE INTERSECTION






Provision of 'green' on the podium & landscaped forecourt (local streets)

Activate chamfer-sides by provision of openings (windows, doors), entrance for people or landscaped gardens

RECOMMENDED ARCHITECTURAL STYLES

Qatari Contemporary*



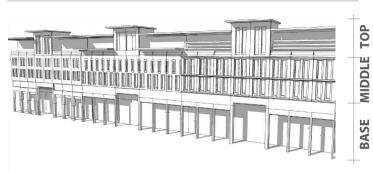








(illustration)

STANDARDS

ARCHITECTURAL STANDARD				
Architectural Theme/ Style	Qatari Contemporary Style (* Refer the details to the <u>Townscape & Architectural Guidelines for Main Streets in Qatar</u>)			
Exterior expression	 Clear building expression of a base, a middle and a top 			
	The Base Part (podium): should clearly be expressed (eg. with architrave or corniche ornament, should there is no required setback for tower that can distinguish it from the podium)			
	The Middle Part: Should adopt local rooted architectural language for its elements such as openings, shutters, balconies, bays etc. Should reveal the external expression of each storey			
	The Top Part should be marked by parapet or entablature			
Minimum Building separation	 6 m between two buildings with facing non-habitable rooms 8 m between two buildings with a facing non-habitable room and a facing habitable room 12 m between two buildings with facing habitable rooms 			
Party-Wall / Common Wall	The attached building's parts should have its own wall and foundation and comply to the standard of construction and fire-safety			
Floor height (maximum)	 Slab to slab height (mid-point): Ground floor: 5 m Ground floor with mezzanine: 6.5 m Typical floors (residential and other): 3.50 m Ground floor ancillary building: 3.50 m 			
Building Orientation	 All the fasade's elements (windows, doors, balcony, bay window, etc) should respect the streets based on their hierarchy. Primary fasade should orientate to the highway /expressway/ collector/ arterial streets. 			
Active frontage features	Entrances, <i>madkhal</i> , lobbies, window openings, arcades, porches etc			
Active chamfer at the intersection	The chamfer side should be activated by providing main access for people and designing active frontage/fasade or small landscaped area with public			


	facilities such as benches, public art, small lawn area, etc			
Building Material	Avoid excessive use of glass-wall Use the low environmental impact materials, that conform to ISO 14025, 14040, 14044, and EN 15804 or ISO 21930			
Window-to-Wall Ratios	Refer to the diagrams			
LANDSCAPE STANDARD				
Forecourt	For buildings along the secondary streets, the forecourts should have small green space for landscape			
Barrier/fences	Street side: not allowed Sides and rear: transparent where possible; maximum height 2.5m			
Green Roof	50% area of the podium and the roof- top should be landscaped with dominant soft-scape (trees, plants, urban farming etc)			
ACCESSIBILITY STANDAR	RD			
Pedestrian access	 Main building entrances should be oriented to the side indicated on the plan. Pedestrian Access on the plan indicates the side for main pedestrian access, not the approximate location 			
Vehicle egress and ingress	Main Vehicular Access on the plan indicates the side and approximate location of the access, subject to site planning and transportation constraints.			
SIGNAGE				
Style	Signage should be an integral part of the building fasade without background.			

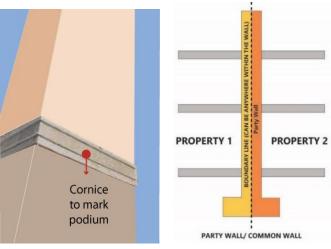

WINDOW-TO-WALL RATIOS



PARKING FORM & LOCATION OPTION

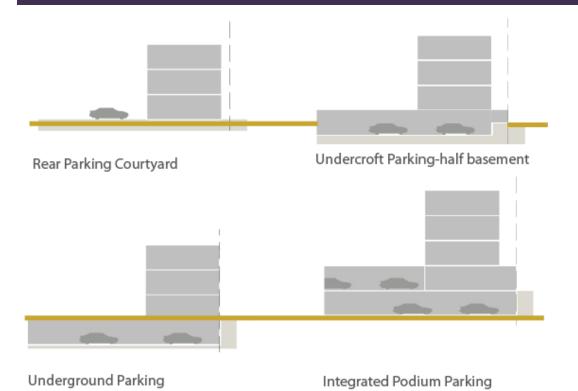

INCENTIVE

Incentive Scheme

Provision of **Privately Owned Public Space – POPS** such *sikka*, pedestrian walkway, public plaza, pocket garden, and Community Facility: Additional floor area of 5 m2 for every 1 m2 provision, up to maximum 10% of total GFA

Provision of Shared Public Parking:

Additional floor area of 50 m2 for provision of each one (1) shared-car parking space, up to maximum 10% of total GFA

PERMITTED USES TABLE

	Type and category	COM	MUC	MUR	RES	Code	Use
		-	_	•	COM	IERCIAL	
	Convenience	√	✓	✓	✓		Food, Beverage & Groceries Shop
	Comparison/Speciality	√	✓	✓	×		General Merchandise Store
	in production g	✓	✓	✓	×		Pharmacy
		√	✓	✓	×		Electrical / Electronics / Computer Shop
A		√	✓	✓	×		Apparel and Accessories Shop
RETAIL	Food and Beverage	✓	✓	✓	✓		Restaurant
8		√	✓	✓	√		Bakery
		✓	✓	✓	✓		Café
	Shopping Malls	✓	✓	×	×		Shopping Mall
	E-charging Stations	✓	×	×	×		E-charging Station
Ж	Services/Offices	✓	✓	✓	×		Personal Services
OFFICE		✓	✓	✓	×		Financial Services and Real Estate
P		✓	✓	✓	×		Professional Services
					RESII	DENTIAL	
	Residential	×	√	√	√		Residential Flats / Apartments
	Residential	**					-
	11 9 19					PITALITY	
	Hospitality accommodation	✓	✓ ✓	✓ ✓	*		Serviced Apartments
		<u> </u>			×	2202	
			S	ECOND	ARY / (MENTARY
	Educational	×	✓	✓	✓		Private Kindergarten / Nurseries / Child Care Centers
		✓	✓	✓	×		Technical Training / Vocational / Language School / Centers
		×	✓	✓	×		Boys Qur'anic School / Madrasa / Markaz
		×	✓	✓	×		Girls Qur'anic School
(0	Health	✓	✓	✓	×		Primary Health Center
Ë		✓	✓	✓	×		Private Medical Clinic
COMMUNITY FACILITIES		✓	✓	×	×		Private Hospital/Polyclinic
ACI		✓	✓	✓	✓		Ambulance Station
F		✓	✓	×	×		Medical Laboratory / Diagnostic Center
\subseteq	Governmental	×	✓	×	×		Ministry / Government Agency / Authority
3		×	✓	×	×		Municipality
M		✓	✓	✓	×		Post Office
S S		✓	✓	✓	✓		Library
	Cultural	✓	✓	✓	×		Community Center / Services
		✓	✓	✓	×		Welfare / Charity Facility
		✓	✓	×	×		Convention / Exhibition Center
		✓	✓	✓	✓		Art / Cultural Centers
	Religious	✓	✓	✓	×	1406	Islamic / Dawa Center
ς.	Open Space & Recreation	✓	✓	✓	✓		Park - Pocket Park
		✓	✓	×	×	1504	Theatre / Cinema
Ž		✓	✓	✓	✓		Civic Space - Public Plaza and Public Open Space
Ι		✓	✓	✓	✓		Green ways / Corridors
ER	Sports	×	✓	✓	×	1607	
토		*	✓	✓	✓	1609	Basketball / Handball / Volleyball Courts
) E		*	✓	✓	✓		Small Football Fields
N		×	✓	✓	✓		Jogging / Cycling Track
SA		✓	✓	✓	✓		Youth Centre
		×	✓	✓	×	1612	Sports Hall / Complex (Indoor)
R	İ	✓	✓	✓	✓		Private Fitness Sports (Indoor)
PORT				✓	✓	1613	Swimming Pool
SPORTS AND ENTERTAINMENT		✓	✓				
	Special Use	✓ ✓	✓ ✓	×	×		Immigration / Passport Office
OTHER SPORT	Special Use				×	2107	

- Supporting uses serves only to the primary use should not be regarded as a separate use. Therefore, their floor area calculation should be included in the GFA of the primary use (e.g. gym facility for residents in an apartment building should be calculated in the Residential GFA, or facilities of a hotel for guests should be calculated in Hospitality GFA).
- Unlisted uses in the table are categorised as non-permitted uses, especially the hazardous/ polluted uses (e.g car repair shops, industries, polluted-workshops, etc).
- Similar uses to the permitted uses in the table will be regarded as conditional cases.