

#### **GENERAL USE MIX** Zoning Category Commercial COM Zoning Code Minimum required number of use type\* 1 Commercial: Retail • Office Residential x Use Type (Flats, Apartments) per Hospitality Zoning $\checkmark$ Hotels, Serviced Apartments) Category Secondary/Complementary Uses $\checkmark$ (Community Facilities, Sport &

Entertainment)

DETAILED USE SPLIT					
	Uses Mix	GFA split			
MUC: Mixed Use Commercial		Plot < 2000 sqm or for Single Tower/ Higher Building	Plot ≥ 2000 sqm or for Multiple Tower/ Higher Buildings	Allowed Floor Location	
Commercial**:		Total Com. 25% min	Total Com. 25% min	All	
Retail     Office	Ø	Retail 25% max	Retail 25% max	Retail at ground level; podium; 1 <sup>st</sup> floor above podium; top floor level	
Residential (Flats, Apartments)	✓	80% max	80% max	All	
Hospitality (Hotels, Serviced Apartments)	✓		40% max	All Semi-public /publicly accessible facilities (e.g. commercial space) at ground level; podium; 1st floor above podium; top floor level	
Secondary/Complementary Uses	~	20% max		Podium; 1 <sup>st</sup> floor above podium; top level	

Uses mix: ☑ Required; ✓ Allowed; ➤ Not allowed;

\* In Mixed Use Residential, the required Residential Use Type can be substituted with Hospitality Use Type (e.g. hotel, serviced apartment); \*\* In Mixed Use Commercial, mixing between Commercial Uses only (Retail & Office) is allowed and this already fulfils the requirement 2 mix

SPECIFIC USE REGULATIONS	
Permitted uses	See Permitted Uses Table (page
Recommended Uses	Type of commercial in MUC: E main offices) and complementar
Not permitted uses	All other uses not listed in the G
Active Frontage Uses	Percentage: For marked-sides a
	Retail, Shops, Food and Beve Clinics, Community Centres,

QATAR NATIONAL MASTER PLAN

**BLOCK 18-11** 

Mixed Use Commercial	Mixed Use Residential	Residential
MUC	MUR	RES
2	2	1
<b>√</b> **	~	×
✓	<b>⊻</b> *	
✓	✓	<b>~</b>
✓	~	~
	•	


#### ge 4)


Establishments and offices with goods or services that cater city-wide (ie. ary to the cultural facilities in the Downtown area

General Permitted Uses Table (e.g. garage/car repair/heavy industry etc)

as Active Frontages, min. 60% frontage required as Active Uses

verage (F&B), Offices, Services, Hotels, Government Offices, Libraries, etc

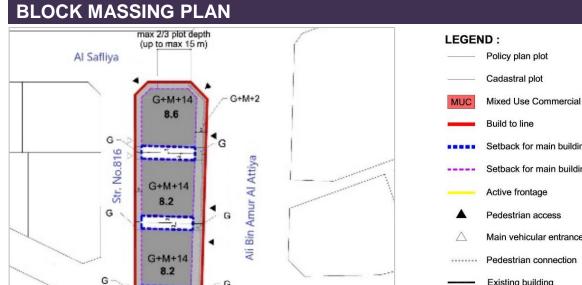

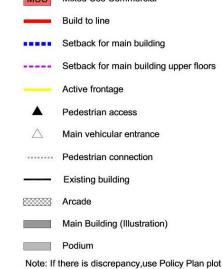

(not cadastral plot)

### **BUILDING ENVELOPE & MASSING ILLUSTRATION**

G


G+M+2

1


G+M+14

8.6

Str.No 816

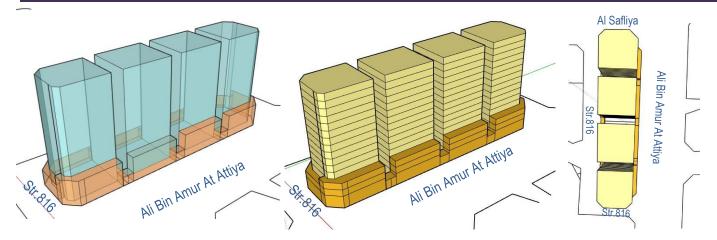

## **BUILDING TYPOLOGY: ATTACHED-PODIUM AND TOWER**

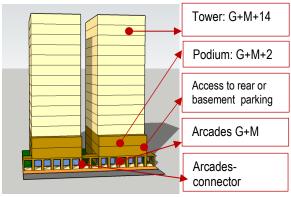

Ali Bin Amur At Attiya Street (Collector Street)

# **BLOCK FORM REGULATIONS**

Uses (as per Zoning Plan)	MUC: Mixed Use Commercial		
Height (max)	Ali Bin Amur At Attiya Street	57.2 m (max)	
	• G+M+14 (Podium G+M+2)		
FAR (max)	<b>8.20 (</b> along Ali Bin Amur At Attiya Street)	(+ 5 % for corner lots)	
Building Coverage (max)	75%		
MAIN BUILDINGS	-	-	
Typology	Attached-Podium and Tov	ver	
Building Placement	Setbacks as per block plan:		
	<ul> <li><u>Podium</u>: 0 m front; 0 m on sides, up to 3 m (depth of tower set back) &amp; 3 m for the remaining 1/3 plot depth;</li> <li><u>Tower</u>: 5m front setback; 3m sides;</li> </ul>		
Build to Line (a set building line on a plot, measured parallel from the front and/or corner side plot line, where the structure must be located. The building facade must be located on the build-to line)	<ul> <li>Ali Bin Amur At Attiya Street (Collector street): 100% of 0m front setback</li> <li>Al Safliya Street: 90% of 0m front setback</li> <li>Street 816: 60% of 0m front setback (mandatory)</li> </ul>		
Building Depth (max)	10 m (single-aspect tower) 15 m (double-aspect tower) 30 m (tower with atrium) 30 m (podium with integrated parking, for plot depth minimum 45 m)		
Building Size	<ul> <li>Fine grain;</li> <li>30 m maximum building width or length; or</li> <li>Create 'a height break impression' (e.g. insert 1-2 storey podium in between, variety fasade design based on modular approach) every interval of 30 m, if the building is stretched too long</li> </ul>		
Primary Active Frontage	As indicated in the plan		
Frontage Profile	<ul> <li>Ali Bin Amur At Attiya Street: Arcades-connector (covered walkways):</li> <li>2.5 m minimum width</li> <li>G+M maximum height</li> <li>Located as per drawing</li> </ul> Al Safliya Street: Colonnades (a row of colums with minimum 1 meter distance to fasade for terrace, etc		

QATAR NATIONAL MASTER PLAN

	Street 816: Fore-court; cantilever/overhang on the ground floor		
Basement; Half- Basement (undercroft)	<ul> <li>Allowed</li> <li>0 m setbacks</li> <li>0.5 m maximum height from street level (undercroft)</li> </ul>		
ANCILLARY BUILDINGS			
Height (max)	G		
Setbacks	• Sides: 0 m		
Building Depth (max)	7.5m		
SITE PLANNING			
Plot Size for Subdivision	Minimum 800 sqm		
Small Plot	<ul> <li>Minimum plot size of 800 sqm will allow to reach G+14, with provision of 1 undercroft and 2 basements for car parking.</li> <li>For plot sizes &lt; 800 m2: Allowed to be developed up to the maximum parameters set in the plan, subject to possibility of providing required parking on site</li> </ul>		
Open Space (min)	5%		
ACCESSIBILITY AND CC	ONNECTIVITY		
Pedestrian Entry Point	As indicated in the plan		
Vehicle Access Point	As indicated in the plan		
Recommended Public Access on Private Plot	n/a		
PARKING			
Location	On-site parking/ undercroft/ basement/ podium parking/ Multi-Storey Car Park (MSCP) for plot size > 2000 sqm		
Required Number of Spaces	As per general MSDP Car Parking Regulations		
Parking Waiver	30% reduction in parking provision requirement		


- All new development should follow the regulations.
- For existing buildings: the setbacks and heights are indicative, for retrofitting /alteration/ modification changes should not exceed the existing massing.
- For existing buildings which are still new and/or in good condition, it is recommended only to add the required frontpart of the building (eg. light structure podium) as per indicated set back and build-to-line (which is zero setback) in the plan

### FONTAGE PROFILES Type 2 Type 1 Tower: G+14 Podium: G+1 Fore-court & landscape Access to rear or Fore-court & Staircase basement parking

### Street 816 : Local Street Type 1 (Fore-court & landscape) or Local Street Type 2 (Fore-court & Staircase, if there is half-basement) LANDSCAPE & ACTIVATE CHAMFER-SIDE AT THE INTERSECTION






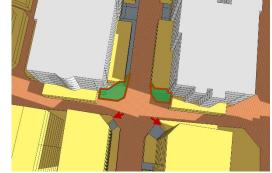

Activate chamfer-sides by provision of openings (windows, doors), entrance for people or landscaped gardens

# **RECOMMENDED ARCHITECTURE STYLES**

# Qatari Contemporary\*

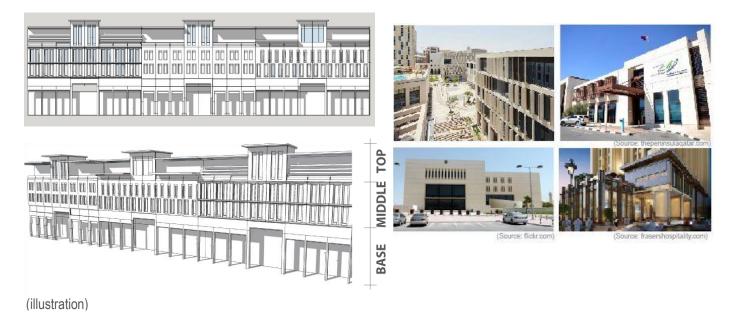



# STANDARDS

ARCHITECTURAL STAND	ARD
Architectural Theme/ Style	Qatari Contemporary Style (* Refer the details to the <u>Townscape &amp;</u> <u>Architectural Guidelines for Main</u> <u>Streets in Qatar</u> )
Exterior expression	<ul> <li>Clear building expression of a base, a middle and a top</li> </ul>
	• The Base Part (podium): should clearly be expressed (eg. with architrave or corniche ornament, should there is no required setback for tower that can distinguish it from the podium)
	<ul> <li>The Middle Part:         <ul> <li>Should adopt local rooted architectural language for its elements such as openings, shutters, balconies, bays etc.</li> <li>Should reveal the external expression of each storey</li> </ul> </li> </ul>
	The Top Part should be marked by parapet or entablature
Minimum Building separation	<ul> <li>6 m between two buildings with facing non-habitable rooms</li> <li>8 m between two buildings with a facing non-habitable room and a facing habitable room</li> <li>12 m between two buildings with facing habitable rooms</li> </ul>
Party-Wall / Common Wall	The attached building's parts should have its own wall and foundation and comply to the standard of construction and fire-safety
Floor height (maximum)	<ul> <li>Slab to slab height (mid-point):</li> <li>Ground floor: 5 m</li> <li>Ground floor with mezzanine: 6.5 m</li> <li>Typical floors (residential and other): 3.50 m</li> <li>Ground floor ancillary building: 3.50 m</li> </ul>
Building Orientation	<ul> <li>All the fasade's elements (windows, doors, balcony, bay window, etc) should respect the streets based on their hierarchy.</li> <li>Primary fasade should orientate to the highway /expressway/ collector/arterial streets.</li> </ul>
Active frontage features	Entrances, <i>madkhal</i> , lobbies, window openings, arcades, porches etc
Active chamfer at the intersection	The chamfer side should be activated by providing main access for people and designing active frontage/fasade or small landscaped area with public

QATAR NATIONAL MASTER PLAN

	1		
	facilities such as benches, public art, small lawn area, etc		
Building Material	<ul> <li>Avoid excessive use of glass-wall</li> <li>Use the low environmental impact materials, that conform to ISO 14025, 14040, 14044, and EN 15804 or ISO 21930</li> </ul>		
Window-to-Wall Ratios	Refer to the diagrams		
LANDSCAPE STANDARD			
Forecourt	For buildings along the secondary streets, the forecourts should have small green space for landscape		
Barrier/fences	Street side: not allowed Sides and rear: transparent where possible; maximum height 2.5 m		
Green Roof	50% area of the podium and the roof- top should be landscaped with dominant soft-scape (trees, plants, urban farming etc)		
ACCESSIBILITY STANDAR	۲D		
Pedestrian access	<ul> <li>Main building entrances should be oriented to the side indicated on the plan.</li> <li>Pedestrian Access on the plan indicates the side for main pedestrian access, not the approximate location</li> </ul>		
Vehicle egress and in- gress	<ul> <li>Main Vehicular Access on the plan indicates the side and approximate location of the access, subject to site planning and transportation constraints.</li> </ul>		
SIGNAGE			
Style	Signage should be an integral part of the building fasade without background.		

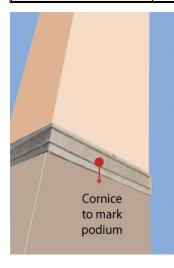


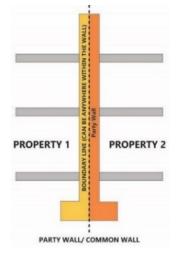


### WINDOW-TO-WALL RATIOS



### **PARKING FORM & LOCATION OPTION**

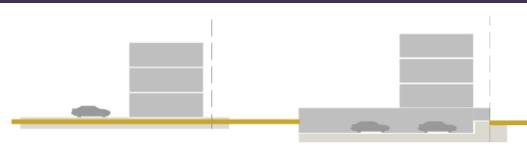

#### Rear Parking Courtyard

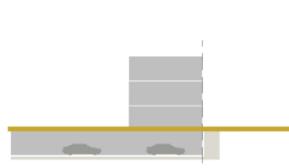

Underground Parking

Integrated Podium Parking

1

1000

-

Undercroft Parking-half basement

### INCENTIVE

### **Incentive Scheme**

Provision of Privately Owned Public Space – POPS such sikka, pedestrian walkway, public plaza, pocket garden, and Community Facility: Additional floor area of 5 m2 for every 1 m2 provision, up to maximum 10% of total GFA

#### Provision of Shared Public Parking:

Additional floor area of 50 m2 for provision of each one (1) shared-car parking space, up to maximum 10% of total GFA

# PERMITTED USES TABLE

	Type and category	COM	MUC	MUR	RES	Co
					COMI	MER
	Convenience	✓	✓	✓	✓	
	Comparison/Speciality	✓	✓	✓	×	
		✓	✓	✓	×	
<u> </u>		✓	✓	✓	×	
M		✓	✓	✓	×	
RETAI	Food and Beverage	$\checkmark$	✓	✓	$\checkmark$	
		~	✓	✓	√	
		✓	✓	✓	√	
	Shopping Malls	$\checkmark$	$\checkmark$	×	×	
	E-charging Stations	$\checkmark$	×	×	×	
빙	Services/Offices	✓	✓	✓	×	
OFFICE		<ul> <li>✓</li> </ul>	✓	✓	×	
ō		✓	✓	✓	×	
					RESI	DEN
	Residential	×	✓	✓	✓	
					HOSE	PITA
	Hospitality accommodation	$\checkmark$	✓	✓	×	2
		✓	✓	✓	×	2
			S	ECOND	ARY /	ĊOM
	Educational	×	<ul> <li>✓</li> </ul>	✓	√	
		✓	✓	✓	×	
		×	√	✓	×	1
		×	✓	✓	×	-
	Health	✓	✓	✓	×	
IES		✓	✓	✓	×	-
5		✓	✓	×	×	-
CII		✓	✓	✓	√	
FA		✓	✓	×	×	1
≽	Governmental	×	✓	×	×	
N		×	✓	×	×	-
IM		✓	✓	✓	×	
ON		✓	✓	✓	√	-
0	Cultural	✓	✓	✓	×	
		✓	✓	✓	×	1
		✓	✓	×	×	1
SPORTS AND ENTERTAINMENT COMMUNITY FACILITIES		✓	✓	✓	✓	1
	Religious	✓	✓	✓	×	1
F	Open Space & Recreation	✓	✓	✓	√	1
EN		✓	✓	×	×	1
M		√	✓	✓	✓	
AIR		✓	✓	✓	√	1
RT	Sports	×	✓	✓	×	1
Ë		×	✓	✓	√	1
		×	✓	✓	√	1
ND		×	✓	✓	√	1
S A		✓	✓	✓	√	1
RT		×	✓	✓	×	1
0		✓	✓	✓	✓	1
5		✓	✓	✓	√	1
					l .	
	Special Use	$\checkmark$	$\checkmark$	×	×	4
<b>OTHER</b>	Special Use	✓ ✓	✓ ✓	×	× ×	

 Supporting uses serves only to the primary use should not be regarded as a separate use. Therefore, their floor area calculation should be included in the GFA of the primary use (e.g. gym facility for residents in an apartment building should be calculated in the Residential GFA, or facilities of a hotel for guests should be calculated in Hospitality GFA). • Unlisted uses in the table are categorised as non-permitted uses, especially the hazardous/ polluted uses (e.g car repair shops, industries, polluted-workshops, etc).

• Similar uses to the permitted uses in the table will be regarded as conditional cases.

QATAR NATIONAL MASTER PLAN

**BLOCK 18-1**<sup>4</sup>

