

USE REG	ULATIONS			
401001 1 B W W W W W W W W W W W W W W W W W	4510018 G+M+10 7.18	Al Asmakh Street		Policy plan plot Cadastral plot MUC Mixed Use Commercial Build to line Setback for main building Setback for main building upper floors Active frontage A Pedestrian access Main vehicular entrance Pedestrian connection Existing building Arcade
	Ahmed Bin Mohammed Bin Thani (A Ring Road)	/ _N 0 10	_20 Mt 1:1000	Main Building (Illustration) Podium Note: If there is discrepancy,use Policy Plan plot (not cadastral plot)

GENER/	AL USE MIX				
Zoning Category Zoning Code		Commercial	Commercial Mixed Use Commercial		Residential
		СОМ	MUC	MUR	RES
Minimun	required number of use type*	1	2	2	1
	Commercial:	V	**	✓	*
Use Type	Residential (Flats, Apartments)	*	✓	✓ *	V
Zoning Category	Hospitality (Hotels, Serviced Apartments)	✓	✓	✓	✓
	Secondary/Complementary Uses (Community Facilities, Sport & Entertainment)	✓	✓	✓	✓
See details	of Permitted Uses Table in page 4				


DETAILED USE SPLIT				
		GFA	Allowed Floor Location	
MUC: Mixed Use Commercial	Uses Mix	Plot < 2000 sqm or for Single Tower/ Higher Building Plot ≥ 2000 sqm or for Multiple Tower/ Higher Buildings		
Commercial**:		Total Com. 30% min	Total Com. 15% min	All
Retail Office	\square	Retail 65% max	Retail 25% max	Retail at ground level; podium; 1st floor above podium; top floor level
Residential (Flats, Apartments)	✓	70% max	80% max	All
Hospitality (Hotels, Serviced Apartments)	√		40% max	All Semi-public /publicly accessible facilities (e.g. commercial space) at ground level; podium; 1st floor above podium; top floor level
Secondary/Complementary Uses	✓	20% max		Podium; 1st floor above podium; top level

Uses mix: ☑ Required; ✓ Allowed; ➤ Not allowed;


* In Mixed Use Residential, the required Residential Use Type can be substituted with Hospitality Use Type (e.g. hotel, serviced apartment);

** In Mixed Use Commercial, mixing between Commercial Uses only (Retail & Office) is allowed and this already fulfils the requirement 2 mix


SPECIFIC USE REGULATIONS			
Permitted uses See Permitted Uses Table (page 4)			
Recommended Uses	Type of commercial in MUC: Establishments and offices with goods or services that cater city-wide (ie. main offices) and complementary to the cultural facilities in the Downtown area		
Not permitted uses	All other uses not listed in the General Permitted Uses Table (e.g. garage/car repair/heavy industry etc)		
Active Frontage Uses	Percentage: For marked-sides as Active Frontages, min. 60% frontage required as Active Uses		
	Retail, Shops, Food and Beverage (F&B), Offices, Services, Hotels, Government Offices, Clinics, Community Centres, Libraries, etc		

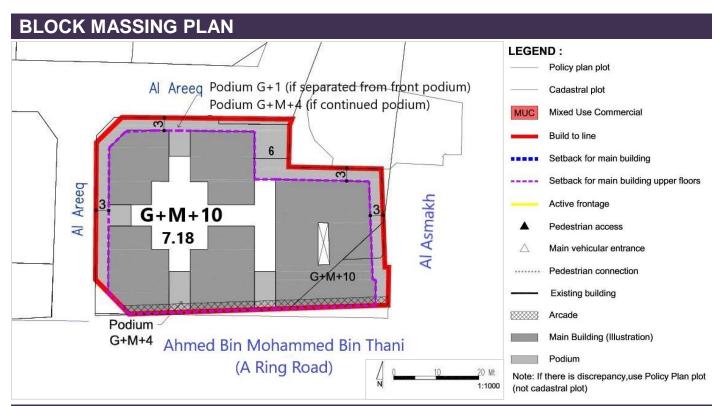

BUILDING ENVELOPE & MASSING ILLUSTRATION

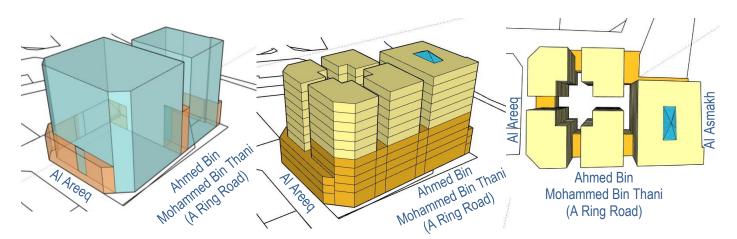

BUILDING TYPOLOGY: ATTACHED-PODIUM AND TOWER

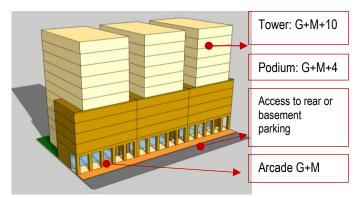

Ahmed Bin Mohammed Bin Thani Street (A Ring Road)


BLOCK FORM REGULATIONS

BULK REGULATIONS Uses (as per Zoning Plan)	MUC: Mixed Use Commercia	ı		
Height (max)	G+M+10 (Podium G+M+4)	43.2 m		
Height (max)	Al Areeg Street	41.7 m (max)		
(in the case of possible future subdivision)	• G+10 (Podium G+1)	- +1.7 m (max)		
	Ahmed Bin Mohammed Bin Thani (A Ring Road Street)	43.2 m		
	• G+M+10 (Podium G+M+4)			
FAR (max) (Refer to Site Planning for the Broad Land Use Budget))	7.18			
FAR (max) (in the case of possible future subdivision)	6.10 (along Al Areeq Street) 7.0 (along Ahmed Bin Mohammed Bin Thani -A Ring Road Street)	(+ 5 % for corner lots)		
Building Coverage (max)	75%			
MAIN BUILDINGS				
Typology	Attached-Podium and Tower			
Building Placement	Setbacks as per block plan:			
	Ahmed Bin Mohammed Bin Thani Street (A Ring Road): Podium: 0 m front; 0 m on sides, up to 2/3 plot depth (max.15 m) & 3 m for the remaining 1/3 plot depth Tower: 0m front setback; 3m sides			
	Al Areeq Street: Podium: 0 m front; 0 m on sides, up to max. 2/3 plot depth (max.15 m) & 3 m for the remaining 1/3 plot depth Tower: 3 m front setback; 3 m sides			
Build to Line (a set building line on a plot, measured parallel from the front and/or corner side plot line, where the structure must be located. The building facade must be located on the build-to line)	Ahmed Bin Mohammed Bin Thani Street (A Ring Road) & Al Areeq Street: 100% of 0 m front setback (mandatory) West Local Street min. 60% of frontage indicated at block plan			
Building Depth (max)	10 m (single-aspect tower) 15 m (double-aspect tower) 30 m (tower with atrium) 30 m (podium with integrated parking, for plot depth minimum 45 m)			
Building Size	Fine grain; 30 m maximum building width or length			
Primary Active Frontage	As indicated in the plan			
Frontage Profile	Ahmed Bin Mohammed Bin T Ring Road) : Arcades (covered walkways): • 3 m minimum width	hani Street (A		

	G+M maximum heightLocated as per drawing
	Al Areeq & West Local Street: Colonnades (a row of colums with minimum 1 meter distance to fasade for terrace, etc)
Basement; Half-Basement (undercroft)	 Allowed 0 m setbacks 0.5 m maximum height from street level (undercroft)
ANCILLARY BUILDINGS	
Height (max)	G
Setbacks	 Sides: 0 m, up to max. 2/3 plot depth (max.15 m) & 3 m for the remaining 1/3 plot depth; Rear: 3 m
Building Depth (max)	7.5 m
SITE PLANNING	
Plot Size for Subdivision	Minimum 600 sqm
Small Plot	 Minimum plot size of 600 sqm will allow to reach G+10, with provision of 1 undercroft and 2 basements for car parking. For plot sizes < 600 sqm: <p>Allowed to be developed up to the maximum parameters set in the plan, subject to possibility of providing required parking on site </p>
Open Space (min)	5%
Plots 2000sqm –9999sqm	 FAR: as stated in the Block Massing Plan Building Coverage: 75% Internal open space: 10% min Internal streets & utilities: 15% max
ACCESSIBILITY AND CON	IECTIVITY
Pedestrian Entry Point	As indicated in the plan
Vehicle Access Point	As indicated in the plan
Recommended Public Access on Private Plot	n/a
PARKING	
Location	On-site surface parking/ undercroft/ basement/ podium parking/ Multi-Storey Car Park (MSCP) for plot size > 2000 sqm
Required Number of Spaces	As per general MSDP Car Parking Regulations
Parking Waiver	30% reduction in parking provision requirement

- All new development should follow the regulations.
- For existing buildings: the setbacks and heights are indicative; for retrofitting /alteration/ modification changes should not exceed the existing massing.
- For existing buildings which are still new and/or in good condition, it is recommended only to add the required front-part of the building (eg. light structure podium) as per indicated set back and build-to-line (which is zero setback) in the plan

BUILDING TYPOLOGY

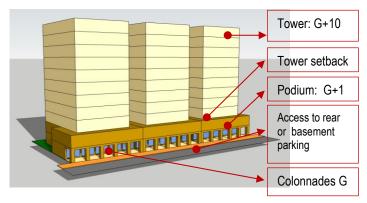

Al Areeq & West Local Street (in the case of possible future subdivision, the podium becomes G+1& Colonnades G)

LANDSCAPE & ACTIVATE CHAMFER-SIDE AT THE INTERSECTION





Provision of green terrace root garden (min. 50% of the area)


Provision of 'green' on the podium & landscaped forecourt (local streets)

Activate chamfer-sides by provision of openings (windows, doors), entrance for people or landscaped gardens

RECOMMENDED ARCHITECTURAL STYLES

Qatari Contemporary*



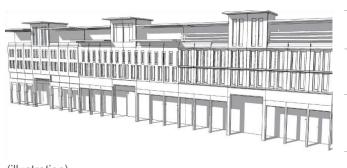



TOP

MIDDLE







(illustration)

STANDARDS


ARCHITECTURAL STANDARI)
Architectural Theme/ Style	Qatari Contemporary Style (* Refer the details to the Townscape & Architectural Guidelines for Main Streets in Qatar)
Exterior expression	Clear building expression of a base, a middle and a top
	The Base Part (podium): should clearly be expressed (eg. with architrave or cornice ornament, should there is no required setback for tower that can distinguish it from the podium)
	The Middle Part: Should adopt local rooted architectural language for its elements such as openings, shutters, balconies, bays etc. Should reveal the external expression of each storey
	The Top Part should be marked by parapet or entablature
Minimum Building separation	 6 m between two buildings with facing non-habitable rooms 8 m between two buildings with a facing non-habitable room and a facing habitable room 12 m between two buildings with facing habitable rooms
Party-Wall / Common Wall	The attached building's parts should have its own wall and foundation and comply to the standard of construction and fire-safety
Floor height (maximum)	 Slab to slab height (mid-point): Ground floor: 5 m Ground floor with mezzanine: 6.5 m Typical floors (residential and other): 3.50 m Ground floor ancillary building: 3.50m
Building Orientation	 All the fasade's elements (windows, doors, balcony, bay window, etc) should respect the streets based on their hierarchy. Primary fasade should orientate to the highway /expressway/ collector/ arterial streets.
Active frontage features	Entrances, <i>madkhal</i> , lobbies, window openings, arcades, porches etc
Active chamfer at the intersection	The chamfer side should be activated by providing main access for people and designing active frontage/fasade or small landscaped area with public facilities such as benches, public art, small lawn area, etc

Building Material	Avoid excessive use of glass-wall Use the low environmental impact materials, that conform to ISO 14025, 14040, 14044, and EN 15804 or ISO 21930
Window-to-Wall Ratios	Refer to the diagrams
LANDSCAPE STANDARD	
Forecourt	For buildings along the secondary streets, the forecourts should have small green space for landscape
Barrier/fences	Street side: not allowed Sides and rear: transparent where possible; maximum height 2.5m
Green Roof	50% area of the podium and the roof- top should be landscaped with dominant soft-scape (trees, plants, urban farming etc)
ACCESSIBILITY STANDA	RD
Pedestrian access	 Main building entrances should be oriented to the side indicated on the plan. Pedestrian Access on the plan indicates the side for main pedestrian access, not the approximate location
Vehicle egress and in- gress	Main Vehicular Access on the plan indicates the side and approximate location of the access, subject to site planning and transportation constraints.
SIGNAGE	
Style	Signage should be an integral part of the building fasade without background.
Cornice to mark podium	PROPERTY 1 PROPERTY 1 PROPERTY 1 PROPERTY 1

WINDOW-TO-WALL RATIOS



PARKING FORM & LOCATION OPTION

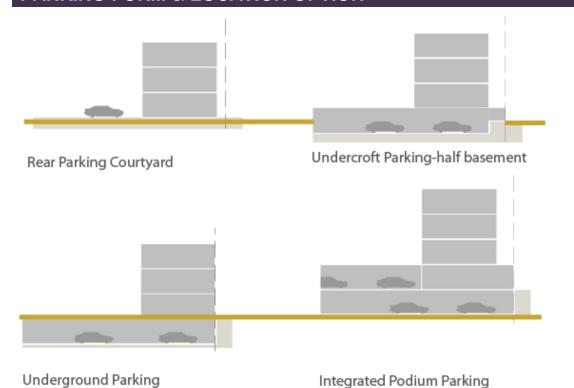

INCENTIVE

Incentive Scheme

Provision of **Privately Owned Public Space – POPS** such *sikka*, pedestrian walkway, public plaza, pocket garden, and Community Facility: Additional floor area of 5 m2 for every 1 m2 provision, up to maximum 10% of total GFA

Provision of Shared Public Parking:

Additional floor area of 50 m2 for provision of each one (1) shared-car parking space, up to maximum 10% of total GFA

PERMITTED USES TABLE

	Type and category	COM	MUC	MUR	RES	Code	Use
						/IERCIAL	
	Convenience	√	✓	✓	√		Food, Beverage & Groceries Shop
	Comparison/Speciality	√	✓	√	×		General Merchandise Store
	Companioninopoolianty	√	✓	√	×		Pharmacy
		√	✓	√	×		Electrical / Electronics / Computer Shop
ļ		√	✓	√	×		Apparel and Accessories Shop
ZE I AIL	Food and Beverage ✓		✓	√	√		Restaurant
Y	. oou una zoro. ugo	√	✓	√	√		Bakery
		√	✓	✓	✓		Café
	Shopping Malls	√	✓	×	×		Shopping Mall
	E-charging Stations	√	×	×	×		E-charging Station
ш	Services/Offices	√	✓	√	×	401	Personal Services
<u>ا</u>		√	✓	√	×		Financial Services and Real Estate
		√	✓	√	×		Professional Services
		<u>L</u>	<u>L</u>	<u> </u>	RESII	DENTIAL	T TOTOGOTOTICAL CONTINUOS
	Residential	×	√	√	✓		Residential Flats / Apartments
	Residential					PITALITY	
	Hospitality accommodation		√	√	поэг ×		Serviced Apartments
	nospitality accommodation	✓	V	<i></i>	×	2201	
		T					MENTARY
	Educational	×	√	√	✓		Private Kindergarten / Nurseries / Child Care Centers
		✓	✓	✓	×	1020	Technical Training / Vocational / Language School / Centers
		×	✓	✓	×		Boys Qur'anic School / Madrasa / Markaz
		×	✓	✓	×		Girls Qur'anic School
O.	Health	√	✓	✓	×		Primary Health Center
Ľ		√	✓	✓	×		Private Medical Clinic
Į		√	√	×	×		Private Hospital/Polyclinic
Z Z		√	√	✓	✓		Ambulance Station
COMMUNITY FACILITIES		✓	√	×	×		Medical Laboratory / Diagnostic Center
Ţ	Governmental	×	√	×	×		Ministry / Government Agency / Authority
2		×	✓	×	×		Municipality
		√	✓	√	×		Post Office
3		✓	✓	✓	✓		Library
	Cultural	√	√	√	×		Community Center / Services
		✓	✓	✓	*		Welfare / Charity Facility
		✓	✓	×	×		Convention / Exhibition Center
	D. P. 1	√	√	√	✓		Art / Cultural Centers
	Religious	✓	√	√	×	1406	Islamic / Dawa Center
2	Open Space & Recreation	√	√	√	√	4504	Park - Pocket Park
		√	√	*	×	1504	Theatre / Cinema
		✓	✓	✓			Civic Space - Public Plaza and Public Open Space
SPORTS AND ENTERTAINMENT	0 1	✓	✓ ✓	✓ ✓	✓	4007	Green ways / Corridors
	Sports	*			*		Tennis / Squash Complex
		*	✓ ✓	✓ ✓	✓ ✓	1609	Basketball / Handball / Volleyball Courts
		*				4040	Small Football Fields
		× ✓	√	√	√		Jogging / Cycling Track
			√	√	√		Youth Centre
2		*	√	√	×	1612	Sports Hall / Complex (Indoor)
SPC		√	√	√	√	4040	Private Fitness Sports (Indoor)
		√	✓ ✓	✓	✓		Swimming Pool
			. /	×	×	. 9107	I Immigration / Decement / Ittion
OIHEK	Special Use	✓	∨	×	×		Immigration / Passport Office Customs Office

- Supporting uses serves only to the primary use should not be regarded as a separate use. Therefore, their floor area calculation should be included in the GFA of the primary use (e.g. gym facility for residents in an apartment building should be calculated in the Residential GFA, or facilities of a hotel for guests should be calculated in Hospitality GFA).
 Unlisted uses in the table are categorised as non-permitted uses, especially the hazardous/ polluted uses (e.g car repair shops, industries, polluted-workshops, etc).
- Similar uses to the permitted uses in the table will be regarded as conditional cases.